

THREADED BALL VALVE
螺纹球阀

Threaded Ball Valve GTQ61 Series GTQ61系列二通螺纹球阀

GTQ61系列球阀用于控制水液气管路介质的开启或关闭。
GTQ61 series ball valve is used to control the opening or closing of water, liquid, gas pipeline.



性能-特性

- 管路压力: $\leq 16\text{bar}$ (232PSI)
- 适用介质: 水、油、气 (W.O.G)
- 工作温度: $-20 \sim +185^{\circ}\text{C}$
- 环境温度: $-20 \sim +70^{\circ}\text{C}$

选项&附件

- 控制型式: 气动或电动 (24VDC 220AC 380VAC)
- 位置信号显示装置: APL210
- 5/2电磁阀: VM520 V45K2-15
- 电磁线圈: 24-48-110-220 V DC & 50 Hz AC

OPERATING CONDITIONS

- Container excess pressure: max. 16 bar
- Is suitable the medium: Water, oil, gas (W.O.G)
- Temperature inside vessel: -20 to 185°C
- Ambient temperature inside casing: -20 to 70°C

OPTIONS & ACCESSORIES

- Control mode: pneumatic or electric (24VDC 220AC 380VAC)
- Switch box: APL210
- Solenoid valve: VM520 V45K2-15
- Solenoid Coils: 24-48-110-220 V DC & 50 Hz AC



型号含义 How To Order


GTQ	6	1	-25	P	W	F	220VAC
TYPE 型号	Transfer method 驱动	Screw thread 连接形式	Valve size 阀门口径	Valve Body 阀体材质	Switch box 信号开关	Solenoid valve 电磁换向阀	Voltage 电压
球阀 Ball valve	6=气动Pneumatic 9=电动Electric	11= 螺纹式 Screw thread	DN10-100	R= SUS316 P= SUS304	W	F	24-48-110 220V DC/AC

例如: 选购DN25气动不锈钢螺纹球阀: Q61-25PWF, 如需要加配DC24V电磁阀则型号为: Q6125PWF/24VDC。

THREADED BALL VALVE
螺纹球阀

GTQ61

Air pressure: 4~8bar
Fluid pressure: 0.1~16bar

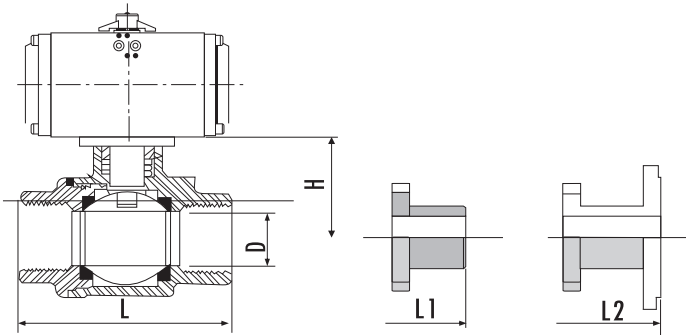

连接尺寸 CONNECTION SIZE

Part # 型号	Material 阀体材质	Seal packing Material	DN	NPS	D	H	L	L1	L2
GTQ61-10	Stainless Steel 不锈钢	F = PTFE 聚四氟乙烯	10	3/8"	12.7	42	75	70	
GTQ61-15			15	1/2"	15	42	75	75	130
GTQ61-20			20	3/4"	20	49	80	90	150
GTQ61-25			25	1"	25	58.5	90	100	160
GTQ61-32			32	1-1/4"	32	63	110	110	180
GTQ61-40			40	1-1/2"	38	70	120	125	200
GTQ61-50			50	2"	50	78	140	150	230
GTQ61-65			65	2-1/2"	65	100	185	190	290

注: 二片式球阀连接形式另有对焊(BW)承插焊(SW), 并均可带国际标准ISO支架和锁定装置。
Note: Two-piece ball valve connection form has the butt welding (BW) to receive in addition inserts welds (SW), and may bring the international standard ISO

Dimensions in mm

Please contact us on any small problems & details.