

PINCH VALVES
夹管阀

Pneumatic Pinch Valve -VM-Series VM气动夹管阀

VM 系列夹管阀用于控制粉体管路介质的开启或关闭。
VM Pinch Valves are used for material flow interception in pneumatic conveying systems, or other pipelines.



性能-特性




- 管路压力 p_i : $\leq 3.5 \text{ bar}$
- 控制压力 p_c : $\leq 6 \text{ bar}$
- 环境温度: $-10 \sim +80^\circ\text{C}$

OPERATING CONDITIONS

- P_i Internal Max. Pneumatic Conveying System Pressure: 3.5 bar
- P_c Closure control Pressure: $P_i + 2.5 \text{ bar}$ (Max. 6 bar)
- Working Temperature: from -10°C up to 80°C



Pinch Valve
夹管阀

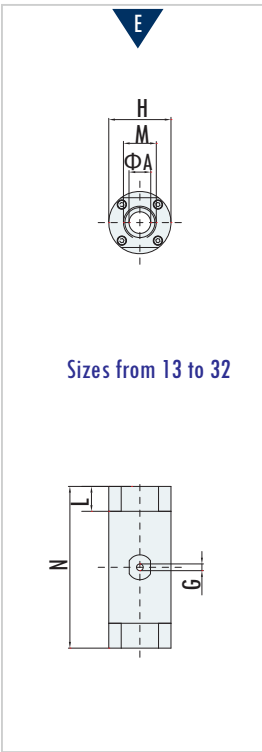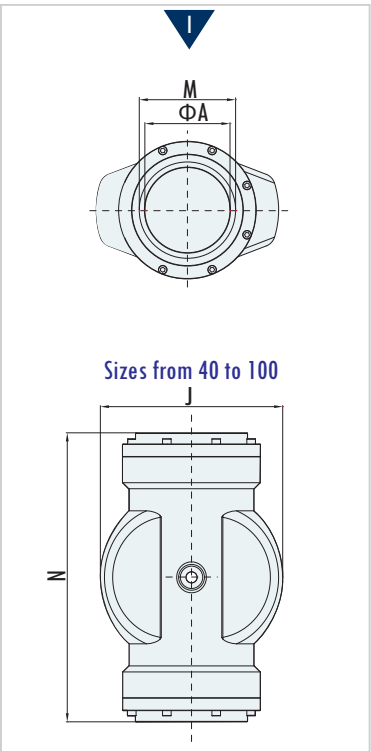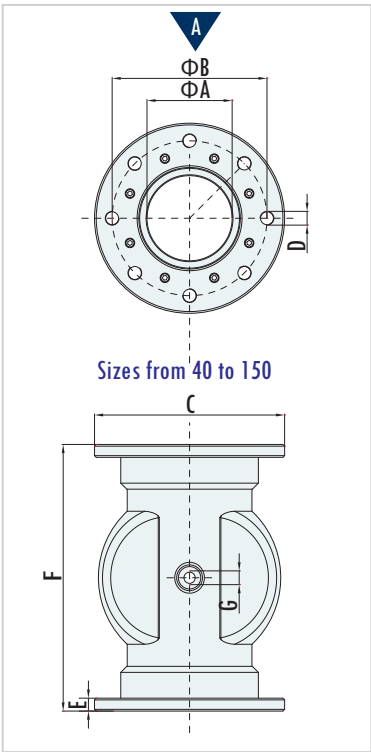

$p_i \text{ max: max } 3.5 \text{ bar}$
 $p_c \text{ max: max } 6 \text{ bar}$

连接尺寸 CONNECTION SIZE

TYPE	A	B	C	D		E	F	G	H	J	L	M	N	kg
				Φ	n°									
VM040	40	110	150	M 16	4	12	178	1/8"		99		1+1/2"	202	2.20
VM050	50	125	165	M 16	4	15	190	1/4"		120		2"	214	3.40
VM065	65	145	185	M 16	4	15	225	1/4"		138		2+1/2"	230	4.00
VM080	80	160	200	M 16	4	15	270	1/4"		180		3"	294	5.40
VM 100	100	180	220	M 16	8	15	310	1/4"		214		4"	334	7.60
VM 125	125	210	250	M 16	8	15	350	1/4"		250				10.20
VM 150	150	240	285	M 16	8	18	396	1/4"		285				15.60
VM 200	200	295	340	M 16	8	25	460	1/4"		374				22.80

Dimensions in mm