

BULK SOLIDS HANDLING EQUIPMENT

VALVE ACTUATORS

阀门驱动装置

Electropneumatic Actuator-RA-Series 气动执行器

RA 型活塞式电磁气动驱动器适合于控制SD型蝶阀的开启和关闭

The RA piston type electromagnetic pneumatic driver is suitable for controlling the opening and closing of the SD butterfly valve




电磁气动执行器 Electropneumatic Actuator

性能-特性 Performance & Technical Features - Benefits

- 工作压力 pressure: 2 ~ 8 bar (29 ~ 116 PSI)
- RA型驱动器上的花键轴和轴套连接符合DIN 5482标准
- 可与其他类型驱动器互换




选项&附件 Options & Accessories

- 电磁线圈Solenoid Coils: 24-48-110-220 V DC & 50 Hz AC

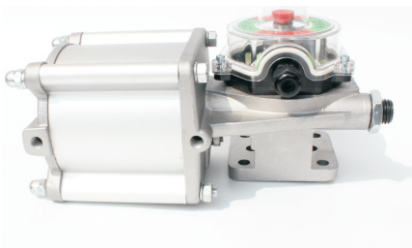

How To Order 型号含义

RA	100	/24VDC
TYPE 型号	Path 缸径	Voltage 控制电压
RA : Actuator 气动执行器	100	24-110-220 DC/AC

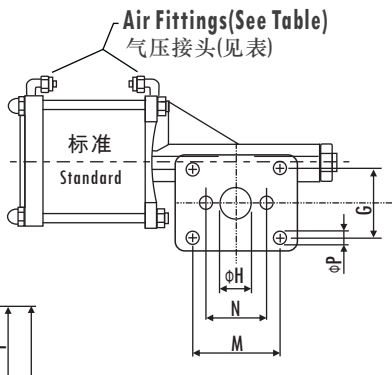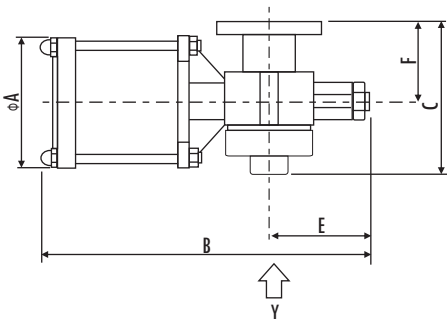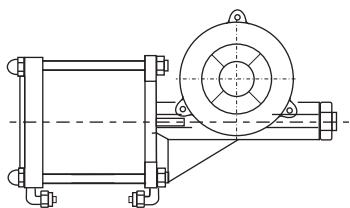

CONNECTION SIZE 连接尺寸

TYPE	ϕA	B	C	D	E	F	G	ϕH DIN 5482	M	N	ϕP	ϕ Thread 接口螺纹	ϕ Hose 接管尺寸	Air Consumption per Cycle at 6 bar (NI) 耗气量	Operation time in sec. at 6 bar 过程时间(秒)	Kg
RA 100	110	260	130	150	85	60	54	22X19	65	50	10	1/8 "	8x6	4.4(x2)	0.8	3.3
DA 100	110	260	130	150	85	60	54	22X19	65	50	10	1/8 "	8x6	4.4(x2)	0.8	3.3

Dimensions in mm